



Outdoor Pole Banner Installation

(1) Top Casting x1




(1) Bottom Casting x1




(5) Rings x2



(2) Fiberglass Arms x2

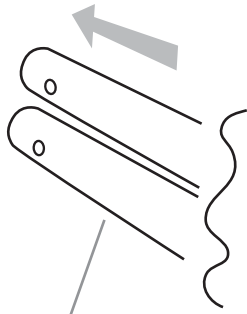


(4) Pins x2




(6) Rubber Caps x2

(3) Stainless Steel Bands x2

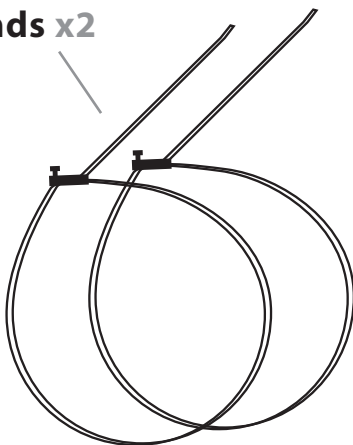

(7) Nylon Zip Ties x2

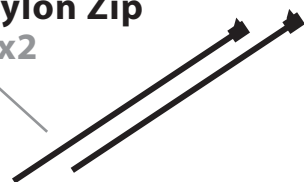

Two Pole Banner Kits Shown

Installation Instructions

1. Take out all parts and identify
2. Attach Top Casting (1) to pole. Be sure the arrow is facing away from the banner. Secure the Top Casting (1) to the pole with two Stainless Steel Bands (3). Tighten the Bands until they hold the bracket securely and lock it into place with a screwdriver or nut driver. Clip off any excess band length.
3. Insert the end of a Fiberglass Arm (2) with the hole in it into the Top Casting (1) line up the holes on the sides of the casting.
4. Secure by inserting a Pin (4) through the holes in the Casting and the Fiberglass Arm. Attach a Ring (5) through the hole at the end of the Pin (4)
5. Place Rubber Cap (6) over the end of the Fiberglass Arm (2)
6. Measure the length of the banner to determine where to place the Bottom Casting
7. Repeat steps 2 - 4 to attach the Lower Casting (1) and Fiberglass Arm (2)
NOTE: Be sure the arrow on the Lower Casting is facing down away from the banner
8. Slide your banner onto the Fiberglass Arms (2). Secure the banner on the top and bottom by threading and Nylon Zip Tie (7) through the Ring (5) and the grommet on the banner



Do not install your outdoor banners in extreme winds (24-31mpg or 6bt and higher) and / or thunderstorms. Do not use near overhead wires. Displaying in high winds or near overhead wires may result in property damage, injury or death and void any and all warranties.

